


Owners Manual

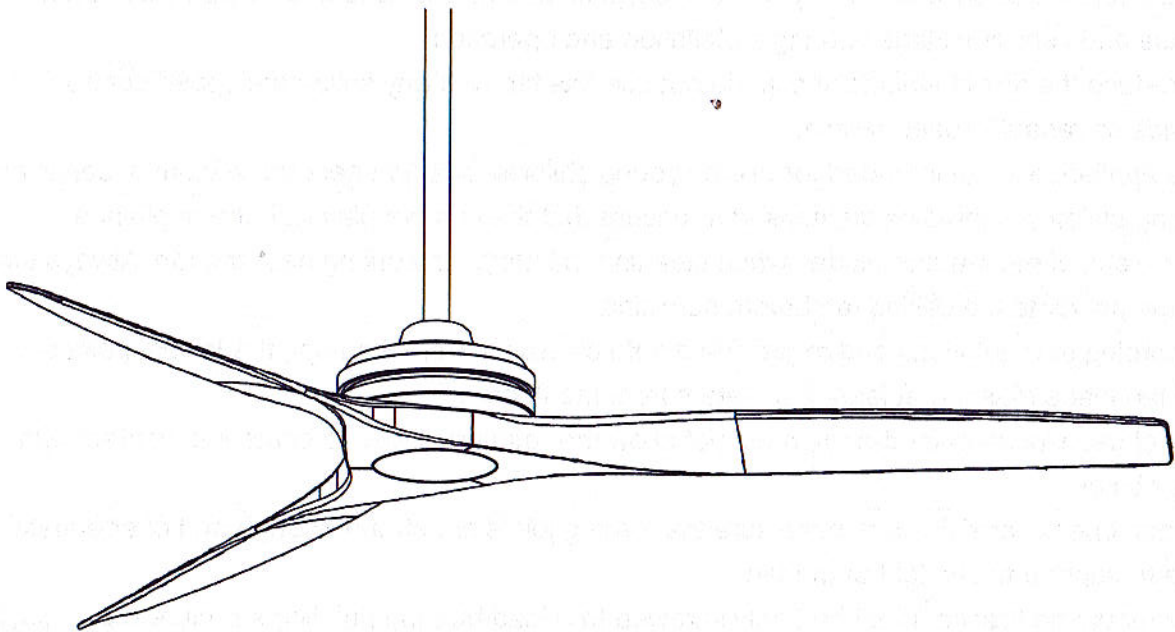

WARNING : Read and follow these instructions carefully and be mindful of all warnings shown throughout.

Periodic
When cle
finish. Ab
prevent c

**RECOM
screws**

Trouble
FAN WI
START

FAN WI

FAN SI
NOISY

READ AND SAVE THESE INSTRUCTIONS

WARNING: TO REDUCE THE RISK OF FIRE, ELECTRICAL SHOCK, OR INJURY TO PERSONS, PLEASE OBSERVE THE FOLLOWING:


Please observe the following general safety precautions carefully before and during all phases handling, installation, removal, operation and maintenance of this appliance.

1. Read all instructions and safety information. Review assembly diagrams provided before installing your new ceiling fan.
2. Make sure that all electrical connections comply with local codes, ordinances, or National electrical codes. Hire a qualified electrician or consult a do-it-yourself writing hand book if you are unfamiliar with installing electrical wiring.
3. All electrical works must only be undertaken after disconnection of the power by removing fuses or turning off the circuit breaker, to ensure all pole isolation of the electrical supply.
4. This manual is not intended to instruct or assist untrained or unqualified persons to install this ceiling fan. It is the responsibility of qualified, licensed installer and user to apply common sense and care at all times during installation and operation.
5. To reduce the risk of electric shock, do not use this fan with any solid-state speed control device or variable speed switch.
6. The appliance is not intended for use by young children or infirm persons without supervision. Young children should be supervised to ensure that they do not play with the appliance.
7. Be careful of the fan and blades when cleaning, painting, or working near the fan. Always turn off the power to the ceiling fan before servicing.
8. According to regulations and to provide a safe clearance from the floor, the lowest point on the fan blade must be at least 2.3 meters from the floor.
9. The chosen location for the fan must not allow the rotating blades to come into contact with any object.
10. Please check carefully and make sure that ceiling joists are strong enough and of adequate size to support the weight of the fan.
11. The mounting bracket must be firmly screwed to a load bearing building structure e.g. a concrete ceiling, steel structure, or a timber frame. If additional timber frames are to be added, those must be securely nailed or screwed between the beams.
12. This fan is to be used in dry and damp locations
13. Check and confirm, after the fan is completely installed, that all connections are proper and secure to prevent the fan from failing or causing property damages or personal injury.



⚠ WARNING: TO REDUCE THE RISK OF SHOCK, THIS FAN MUST BE INSTALLED WITH A GENERAL USE ISOLATING WALL CONTROL/SWITCH.

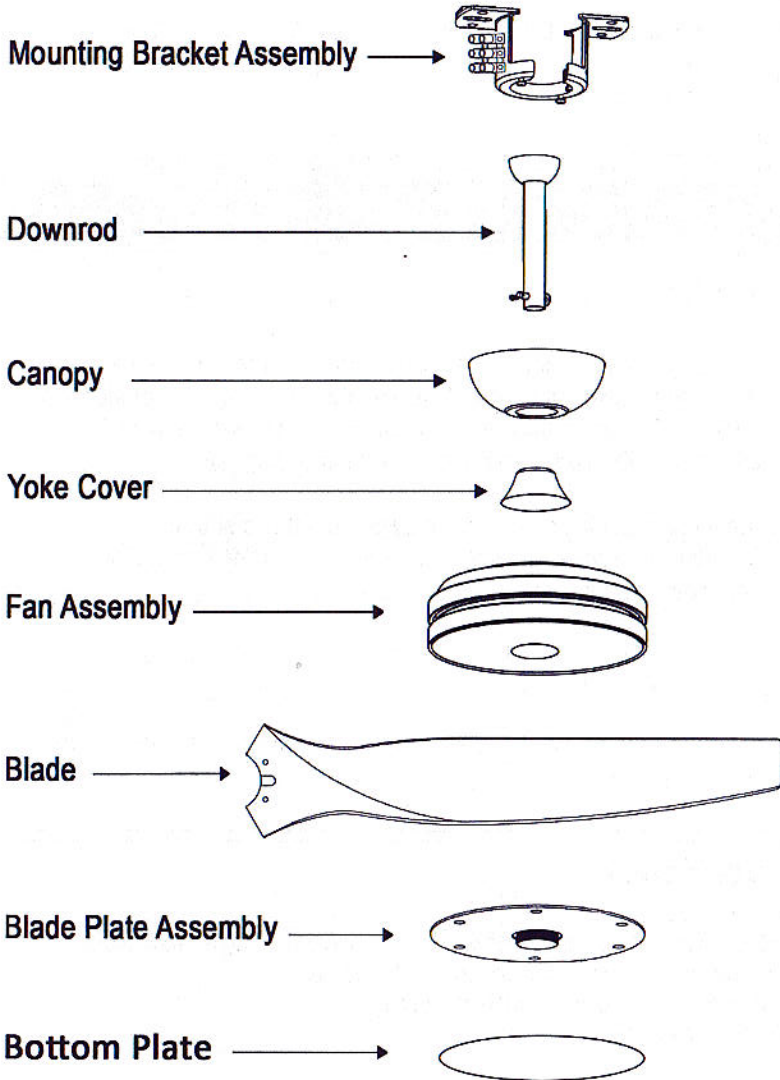

⚠ WARNING: This product is designed to use only those parts supplied with this product and/or accessories designated specifically for use with this product. Using parts and/or accessories not designated for use with this product could result in personal injury or property damage.



Unpack and inspect fan carefully to be certain all contents are included.




HARDWARE BAG (INDOOR)

For Mounting Bracket
 Canopy Screw x 2 
 Wood Screw x 2 

For Fan Blade
 Blade screw x 6 
 Spring washer x 6 



For Blade Balance
 Balanced slice x 1 
 Weight block (3g) x 3 


For Wire Connection
 Wire nut x 3 

HARDWARE BAG (Damp Location)

For Mounting Bracket
 Canopy Screw x 2 
 Wood Screw x 2 
 Washer x 2 

For Fan Blade
 Blade screw with spring washer x 6 


For Blade Balance
 Balanced slice x 1 
 Weight block (3g) x 3 

For Wire Connection
 Wire nut x 3 

WARNING: blades should be at least 7 feet from floor

Note:

Turn off power at breaker box to avoid possible electrical shock.

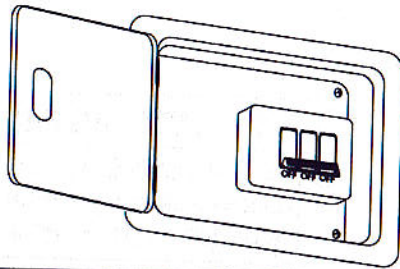

! WARNING

To avoid fire or shock, follow all wiring instructions carefully. Any electrical work not described in these instructions should be approved by a licensed electrician.

! WARNING

Do not operate this fan with a variable (Rheostat) wall control dimmer switch. Doing so could result in damage to the ceiling remote control unit.

Periodic
When cl
finish. A
prevent

RECOI
screws


Trouble
FAN W.
START

FAN W

FAN S
NOISY

1. HANGING SYSTEM INSTALLATION

1A. Installing mounting bracket

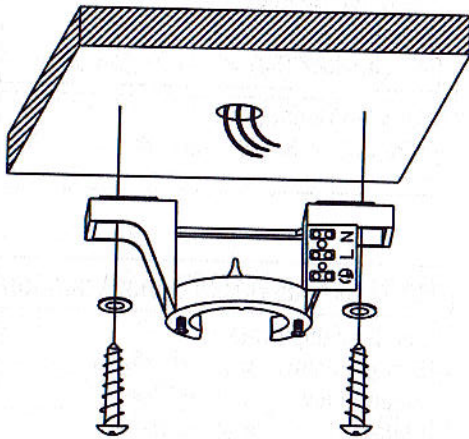


The hanger bracket should be screwed on to a firm flat surface. The fixing location must be able to withstand ten times the static weight of the fan. In most situations two wood screws screwed into a wood joist is more than adequate to support your ceiling fan.

The hanger bracket should be screwed onto the joist with the two wood screws provided. The washers provided should go in the following sequence.


1B. Installing Downrod and Yoke

- 1 Remove cross pin and cotter pin from downrod.
- 2 Insert downrod through canopy and yoke cover, and feed motor lead wires through downrod.
- 3 Loosen 2 downrod jam screws at yoke. Insert downrod assembly into yoke.
- 4 Insert the cross pin through yoke & downrod and secure with cotter pin.
- 5 Tighten both downrod jam screws to further secure downrod.
- 6 Pull down the yoke cover to cover yoke.

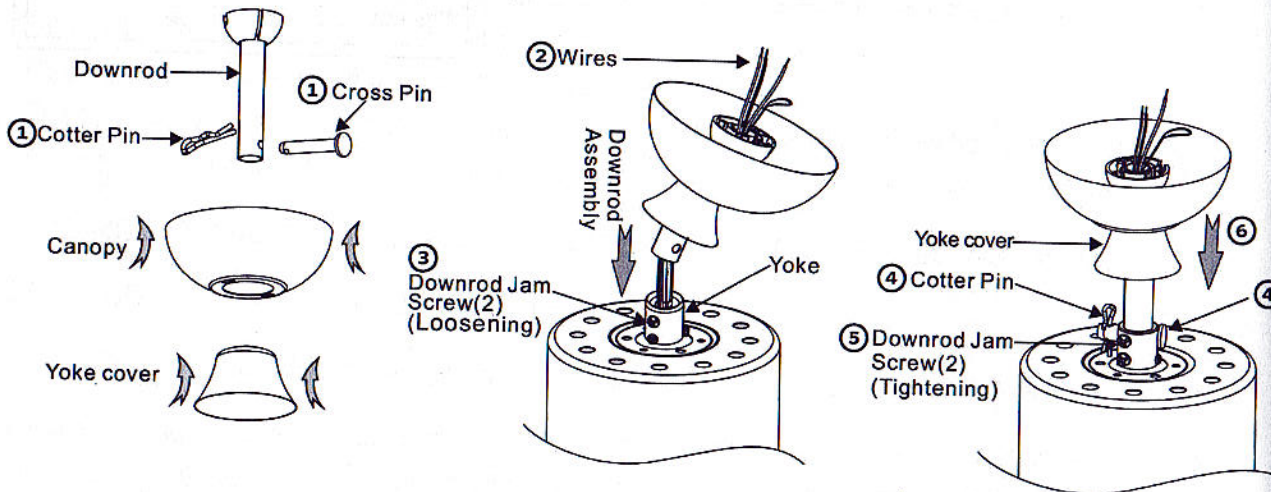


1C. Hanging the fan

Lift fan assembly onto mounting bracket.

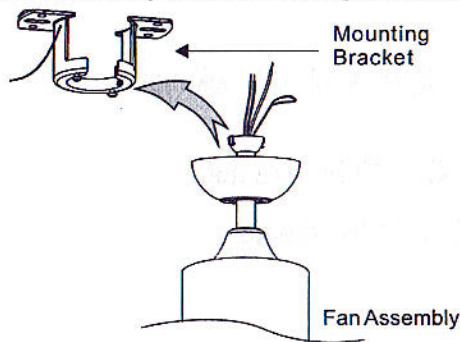

Rotate fan so that the groove on the ball engages the ridge in the mounting bracket.

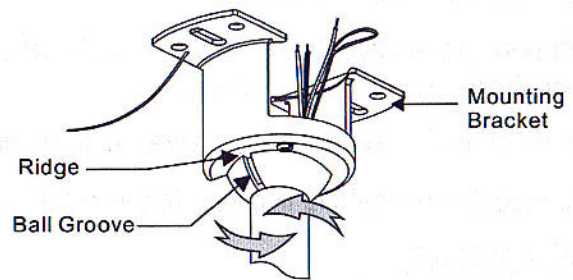


2. WIRE CONNECTION

! WARNING


To avoid possible electrical shock, be sure electricity is turned off at the main fuse box before wiring

CAUTION: INCORRECT WIRE CONNECTION WOULD DAMAGE THIS PRODUCT.




2A. WIRE CONNECTION

1. Connect the fan ground wire (green/yellow) to the household ground wire by wire nut.
2. Connect the fan red wire (S) to the terminal block marked "⎓". Secure the wires with screw driver.
3. Connect the fan blue wire (N) to the terminal block marked "N". Connect the household neutral wire (AC-N) to the other side of terminal block marked "N". Secure the wires with screw driver.
4. Connect the fan brown wire (L) to the terminal block marked "L". Connect the household Live wire to another side of terminal block marked "L". Secure the wires with screw driver.

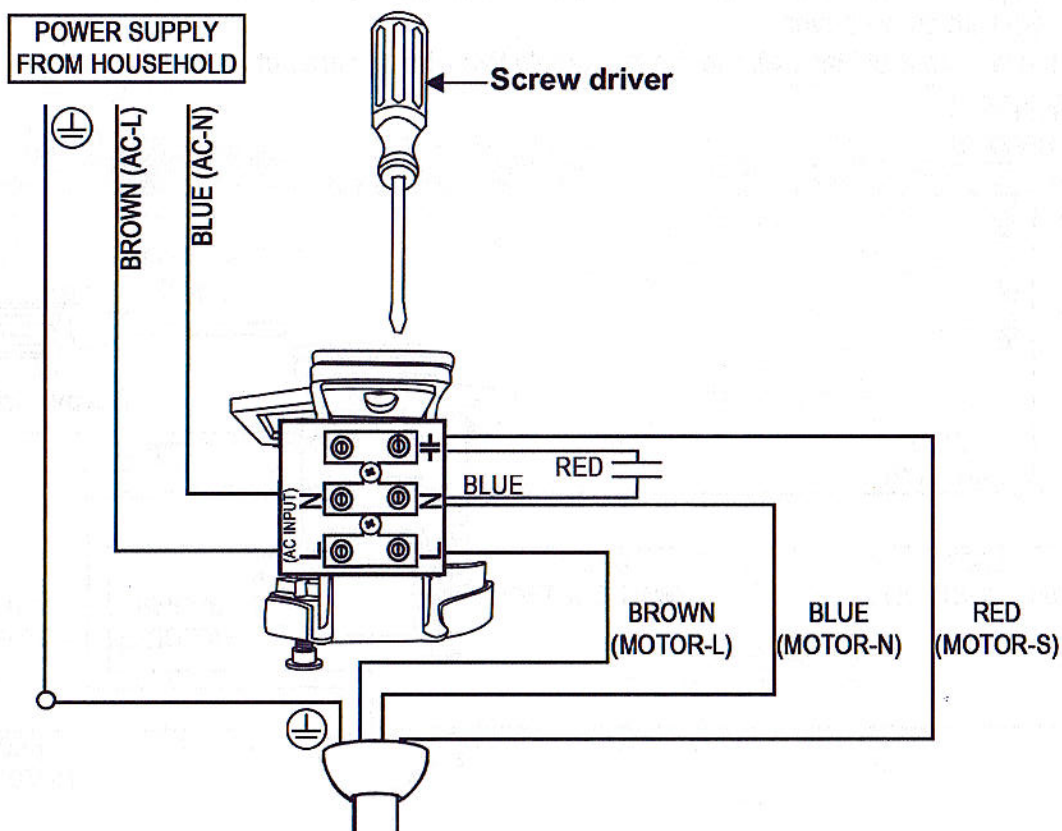


2B. REMOTE CONTROL CONNECTION (OPTION)

1. Connect the receiver blue wire (TO MOTOR N) to the AC IN side of terminal block marked "N". Secure the wires with screw driver.
2. Connect the receiver brown wire (TO MOTOR L) to the AC IN side of terminal block marked "L". Secure the wires with screw driver.
3. Connect the household neutral wire to the receiver blue wire (AC IN N) by wire nut.
4. Connect the household live wire to the receiver brown wire (AC IN L) by wire nut.

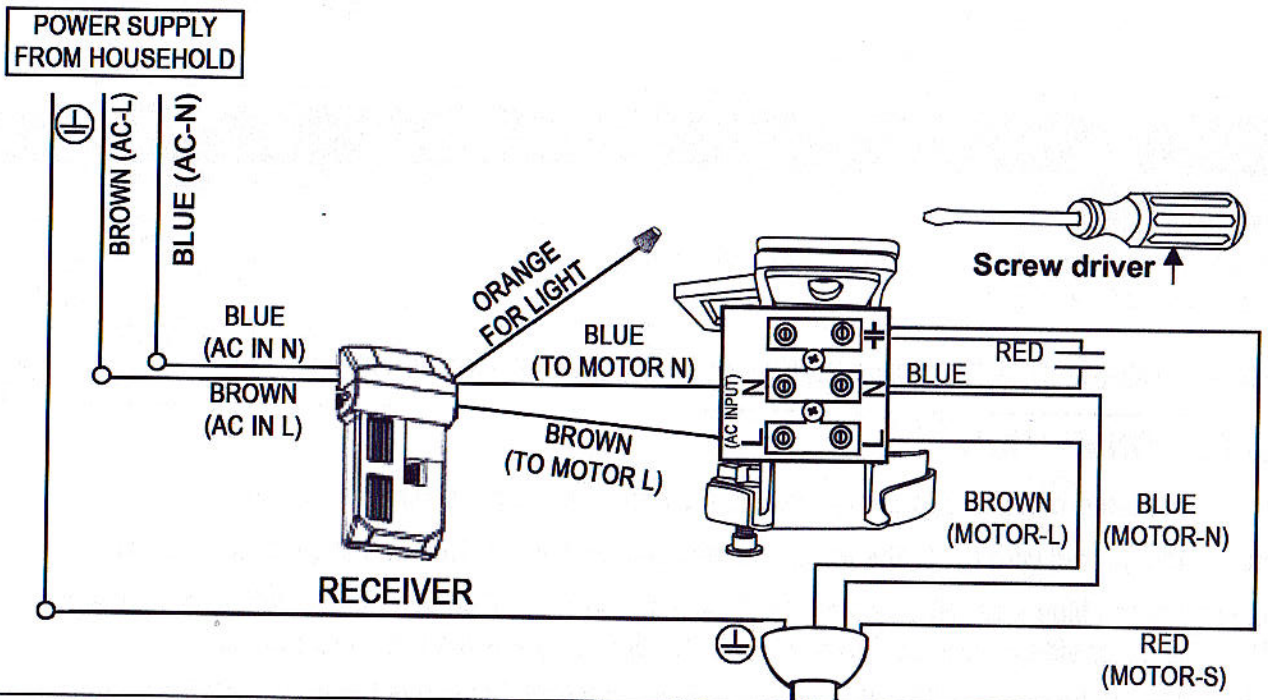


2C. WALL CONTROL CONNECTION (OPTION)

1. Connect the wall control brown wire to the terminal block marked AC INPUT "L". Secure the wire with screw driver.
2. Connect the wall control black wire to the household live wire by wire nut.

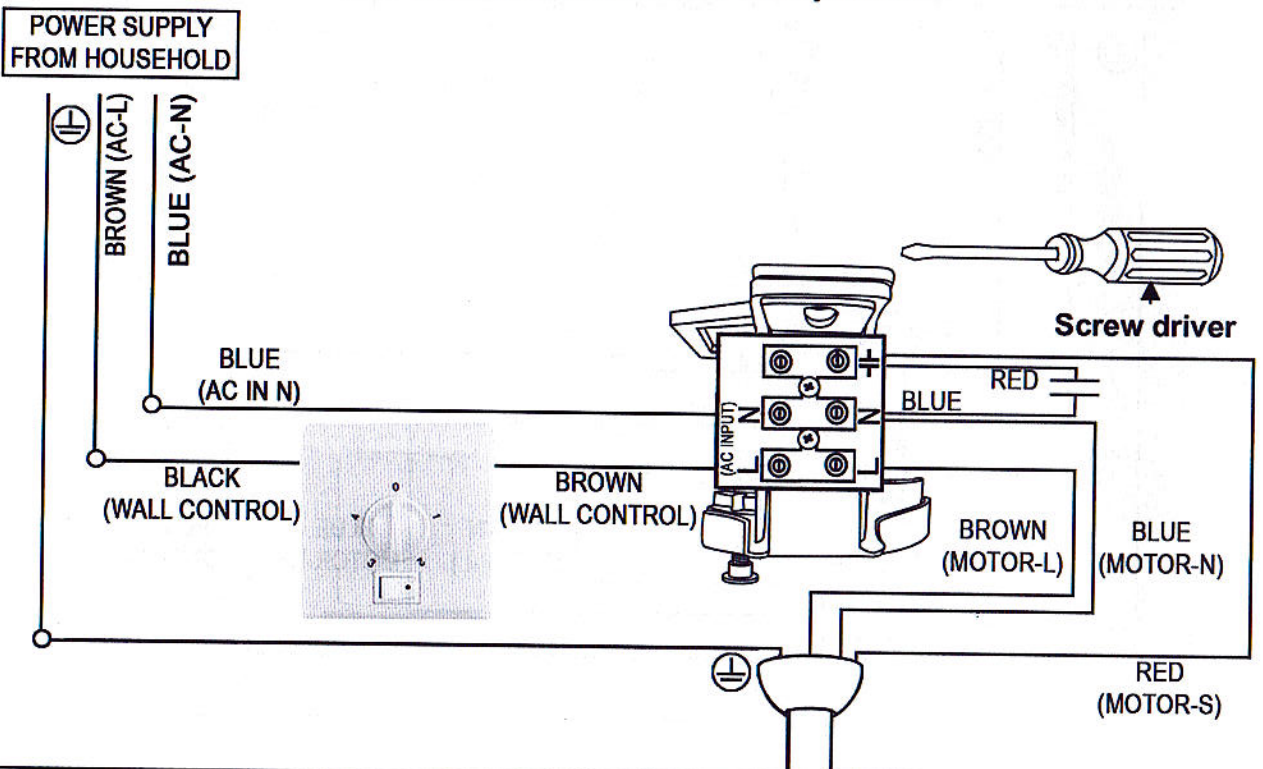


3. CANOPY INSTALLATION

- ① Screw two canopy screws into mounting bracket. Push up canopy until two screws pre-screwed on mounting bracket are engaged with two key holes on canopy.
- ② Rotate canopy slightly until two pre-installed screw heads are engaged in the narrow end of key holes.
- ③ Tighten both screws

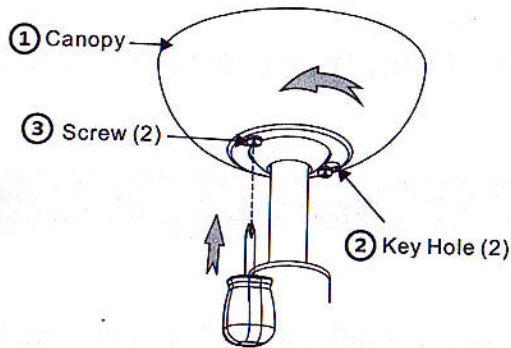


4. BLADE INSTALLATION

Secure the three blades using the screws with spring washers and blade plate assembly through the holes located on the bottom of the motor assembly.

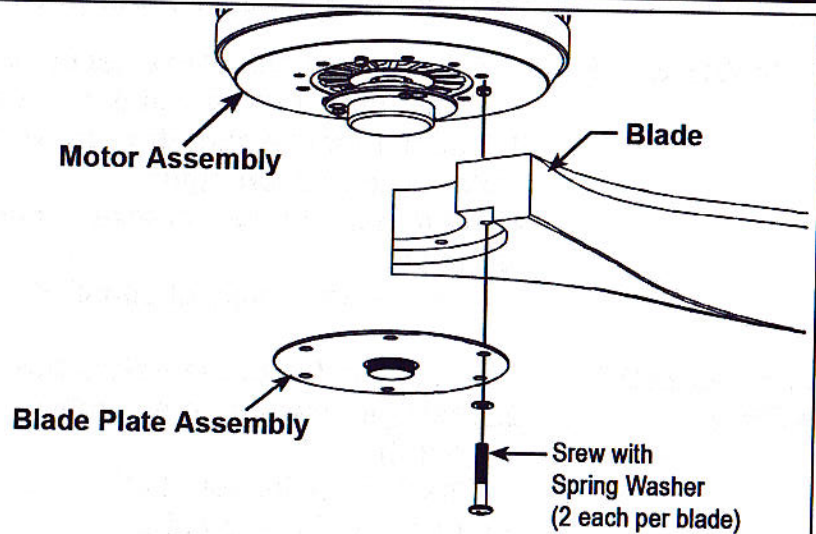

5. BOTTOM PLATE INSTALLATION

Position the bottom cover onto the blade plate assembly bottom.

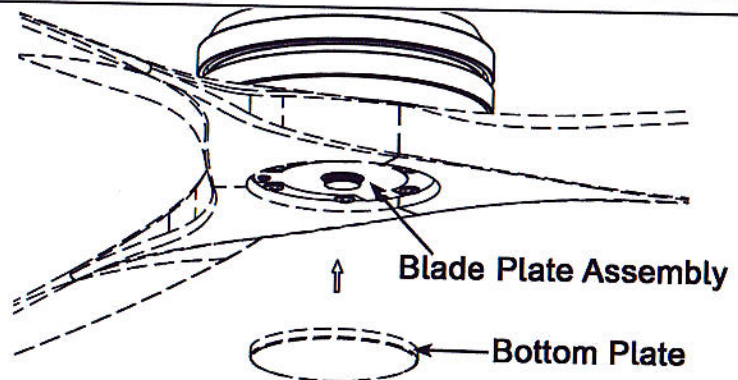

YOUR FAN IS READY TO OPERATION 😊

7. Maintenance

Periodic cleaning of your new ceiling fan is the only maintenance that is needed. When cleaning, use only a soft brush or lint free cloth to avoid scratching the finish. Abrasive cleaning agents are not required and should be avoided to prevent damage to finish.



RECOMENDED: Periodically check that the blade holders to motor hub screws are secure and tight.

8. Trouble Shooting

Trouble	Solution
FAN WILL NOT START	<ol style="list-style-type: none">1. Check main and branch circuit fuses or circuit breakers.2. Check line wire connections to fan and switch wire connections in the switch housings. <p>CAUTION: Make sure main power is turned off !</p>
FAN WOBBLER	<ol style="list-style-type: none">1. Tighten both setscrews securely in downrod support.2. Tighten the setscrew in the downrod/ hanger ball assembly.3. Check to make sure the screws which attach the fan blade to the motor assembly are tight.4. Tighten the hanger bracket screws to the timber batten, and secure outlet box.5. Use the balancing kit supplied.
FAN SOUNDS NOISY	<ol style="list-style-type: none">1. Attach blades to fan before operating.2. Check to make sure all screws in motor housing are snug (not overtight).3. Check to make sure the screws which attach the fan blade to the motor assembly are tight. <p>CAUTION: Make sure main power is turned off !</p> <ol style="list-style-type: none">4. Tighten set screw securely.